


Packaging requirements for the underground waste recovery plant Zielitz

Date: 02/2016

Big-Bags (FIBC)

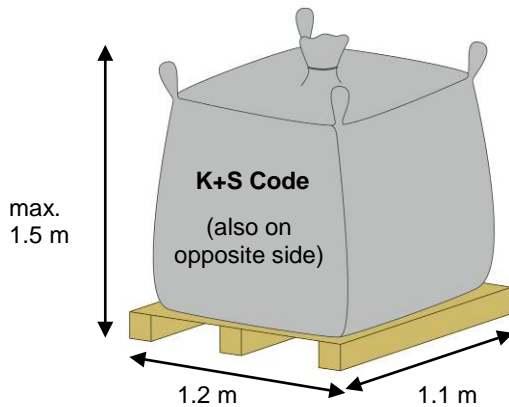

Pallets and big-bags need to be undamaged and clean on the outside, the big-bags tightly sealed.

<p>Big-Bag-Type</p> <ul style="list-style-type: none"> - 4 lifting loops on corners - bottom shape closed (no bottom outlet) - certified for underground use: flame-retardant, mining-hygienically un-objectionable and anti-static - dustproof, e.g. with sealed seams - if applicable composed of two layers - determination of construction type will be effected within the certification-/notification-procedure - certified (e.g. by inspection certificates) as adequate for 6-tier stacking (Min. safety factor: 6:1) 	<p>Labelling</p> <ul style="list-style-type: none"> - durable labelling with 'K+S-code' (no sticker) on opposing sides - height min. 10 cm - visible on the sides that are picked up by fork-lift - if applicable marking in accordance with ADR and GefStoffV
<p>Big-Bag-Filling</p> <ul style="list-style-type: none"> - filling may not project beyond the pallet's base are - only for loose material without pointed, sharp-edged or coarse components (exceptions on special request only) - gross weight in accordance with approval, but not in excess of 1,500 kg - total height closure: max. 1.5 m 	<p>UTD (underground disposal facility)-pallet</p> <ul style="list-style-type: none"> - base area: max. 1.2 m x 1.1 m - to be picked up by fork-lift on the 1.2 m-length side - closed sheeting - certified (e.g. by inspection certificates) as adequate for 8-tier stacking